

1. DESCRIPCIÓN DESCRIPTION DESCRIPTION

Bombas de corriente continua diseñadas para caudales discretos a elevadas presiones. Preparadas para arranque automático a través de presostato.

- ✳ Direct current pumps designed for discrete flow rates at high pressures. Equipped for automatic start-up via a pressure switch.
- 🇫🇷 Pompes à courant continu conçues pour des débits discrets à des pressions élevées. Équipées pour un démarrage automatique via un pressostat



MATERIALES

Cuerpo de bomba: Materiales plásticos
Impulsor: Materiales plásticos
Tomas de conexión: Materiales plásticos
Carcasa motor: Aluminio
Base: Aluminio

✳ MATERIALS

Pump body: Plastic materials
Impeller: Plastic materials
Connection ports: Plastic materials
Motor housing: Aluminum
Base: Aluminum

🇫🇷 MATÉRIELS

Pump body: Matériaux plastiques
Impeller: Matériaux plastiques
Connection ports: Matériaux plastiques
Motor housing: Aluminium
Base: Aluminium

ÁREA DE TRABAJO

Temperatura máx. del líquido: 35°C
Grado de protección: IP55
Aislamiento: F
Tiempo máximo de trabajo en continuo: 15 minutos

✳ WORKING RANGE

Maximum liquid temperature: 35°C
Protection rating: IP55
Insulation: Class F
Maximum continuous operation time: 15 minutes


🇫🇷 PLAGE DE TRAVAIL

Température maximale du liquide : 35°C
Indice de protection : IP55
Isolation : Classe F
Temps maximum de fonctionnement continu : 15 minutes


2. DATOS TÉCNICOS TECHNICAL DATA DONNÉES TECHNIQUES

MODELO	DN	INT (A)		PESO	DATOS HIDRÁULICOS		
		12V	24V		Q MÁX	H MÁX	ASP. MÁX
	Ø"			Kg	l/min	mts.	mts.
R3426348	3/8	-	4,5	3,4	7,6	16	2,5
R3526144	3/8	9,0	-	3,5	11,0	34	2,5
R3626344	3/8	-	5,0	3,5	11,0	26	2,5

3. MEDIDAS MEASURES MESURES

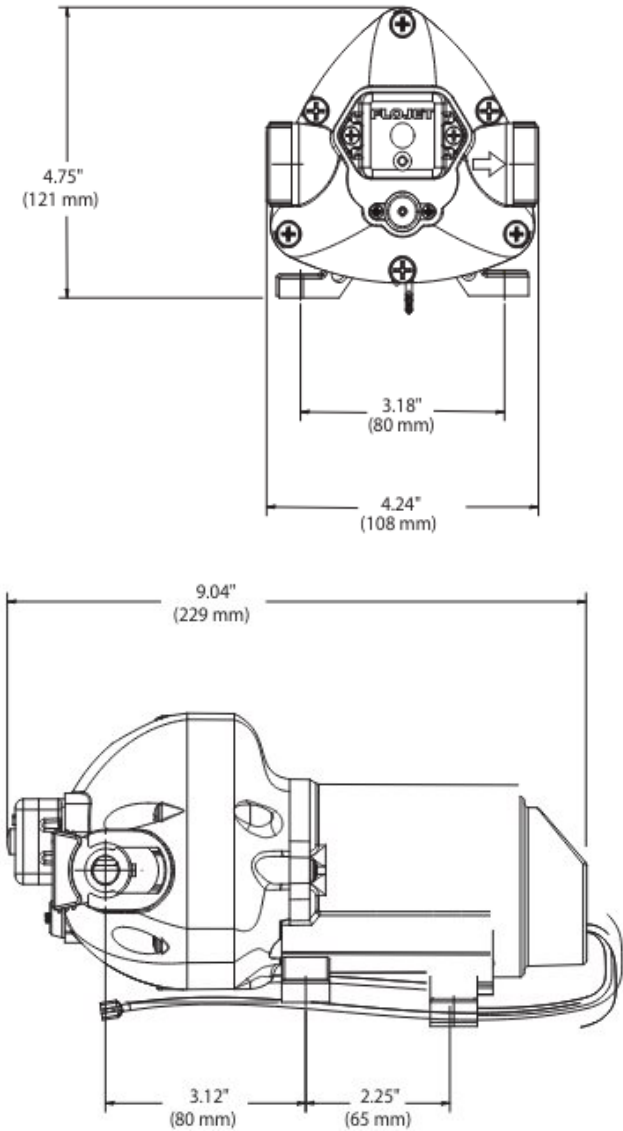


4. DESPIECE SPARE PARTS PIÈCES DE RECHANGE

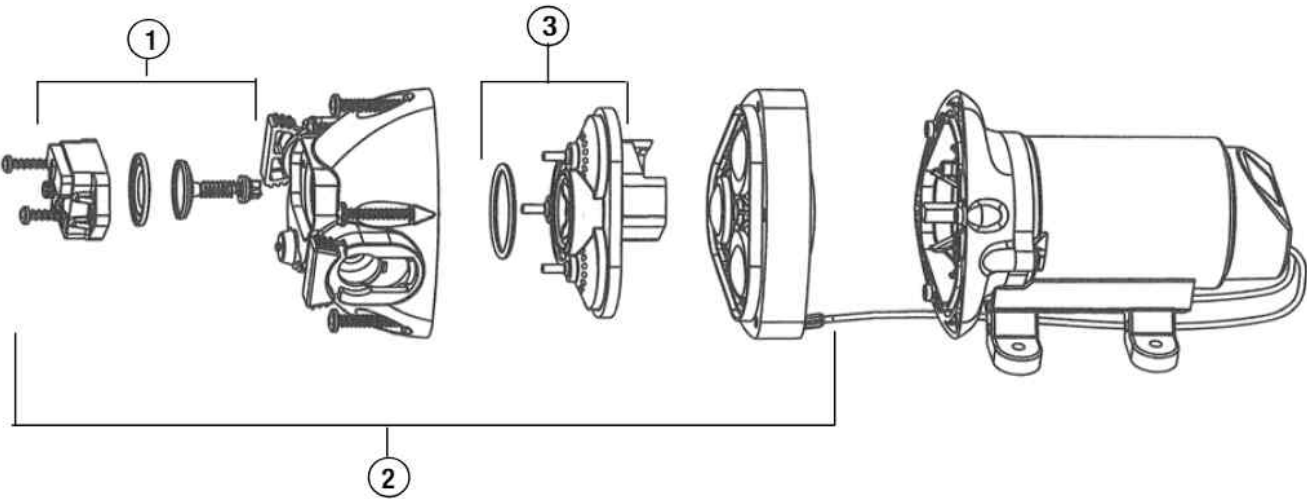


Nº	Nombre	R3426348	R3526144	R3626344
1	Interruptor de presión	2091025	2091050	2091040
2	Conjunto de cabeza de bomba	20408047A (2.9 gpm) 20406048A (2.0 gpm)	20406045A	20406046A
3	Conjunto de válvula de retención	20407034	20407034	20407034

4. DESPIECE SPARE PARTS PIÈCES DE RECHANGE

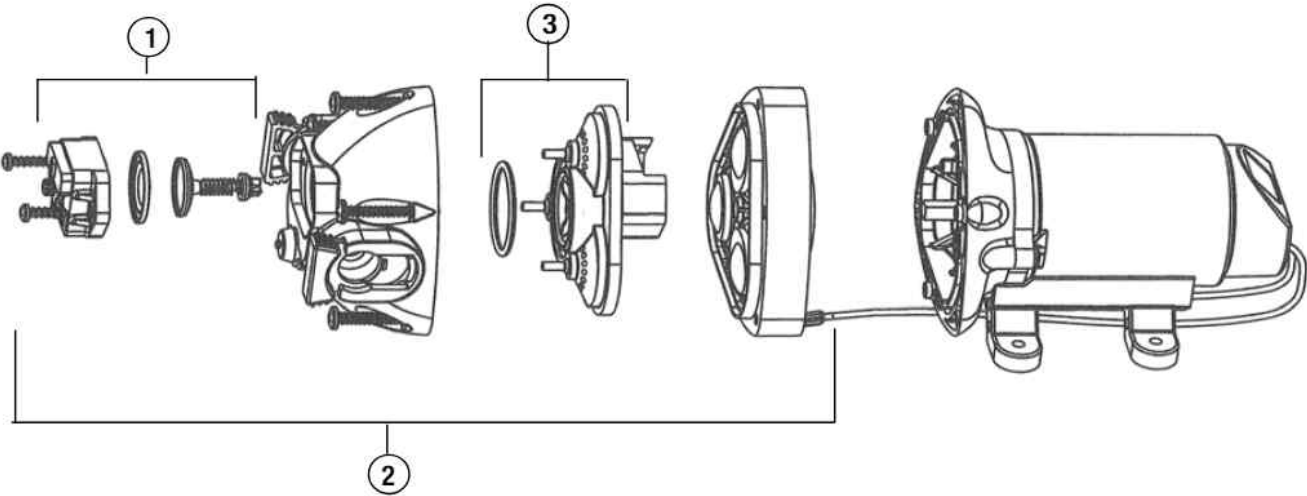

N°	Nombre	R3426348	R3526144	R3626344
1	Pressure switch	2091025	2091050	2091040
2	Pumphead Assembly	20408047A (2.9 gpm) 20406048A (2.0 gpm)	20406045A	20406046A
3	Check Valve Assembly	20407034	20407034	20407034

4. DESPIECE SPARE PARTS PIÈCES DE RECHANGE

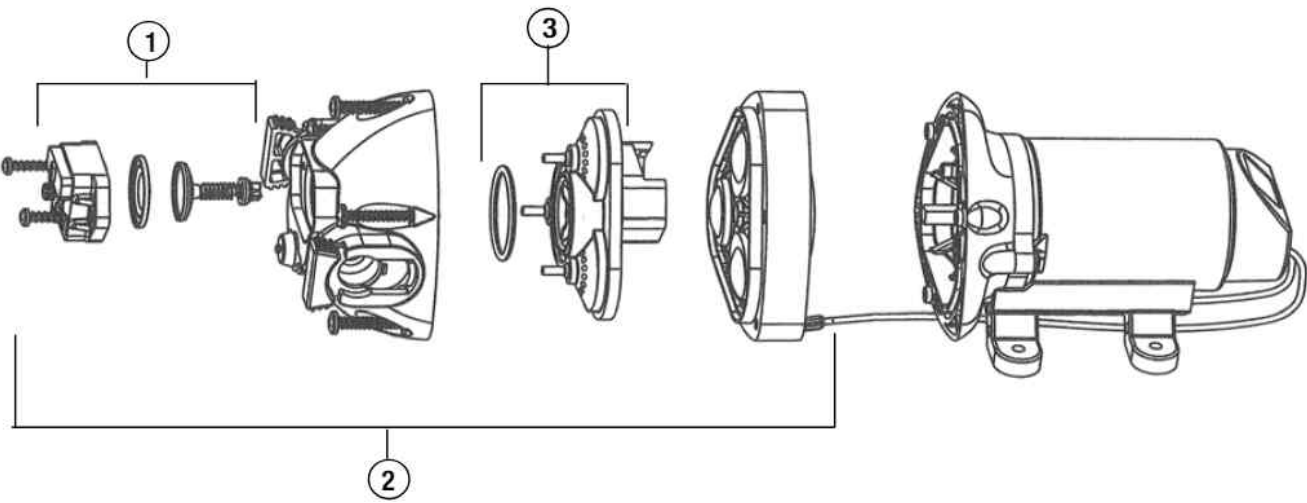

N°	Nombre	R3426348	R3526144	R3626344
1	Interrupteur de pression	2091025	2091050	2091040
2	Assemblage de la tête de pompe	20408047A (2.9 gpm) 20406048A (2.0 gpm)	20406045A	20406046A
3	Assemblage de clapet anti-retour	20407034	20407034	20407034